

BCJ-K &

Explosion Proof Emergency Light



Features

- Zone 1&2, Zone 21&22
- Built-in maintenance-free battery pack, the battery will be charged automatically when power is supply. And it will be in emergency light when the power fails.
- The lamp head can be rotated around 270° from top to bottom, with wide lighting range.
- Easy to install.
- LED indicator of main, charge, fault to easy to know the status of the light.
- Self inspections annual month. And test button for testing any time for user.
- Equipped with an explosion-proof buzzer with a 65dB-85dB voice. When the product is in fault status, the buzzer will work 1-3s every minute to remind the user to maintain the product.

Compliance

ATEX Standard:

ATEX CE


RoHS



Technical Parameter

Specification		
European (ATEX)	(€ 1282 ⊗ II 2G Ex d IIC Gb	
Gas and Dust	(€ 1282 II 2D Ex tb Db	
IP Degree	IP66	
Input voltage	220-240VAC, 50-60Hz	
Power consumption (W)	2*3	
Back-up Battery	>120mins	
Entries	NPT3/4"	
Size (mm)	243*250*78	
Weight (kg)	2.6kg	
Mounting Styles	Ceiling; Wall; Base Mount	

Dimension

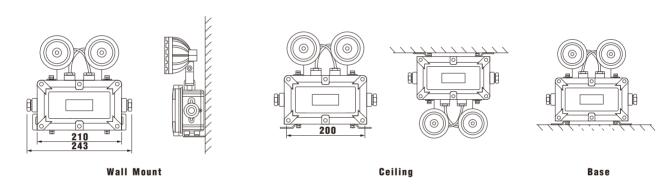

Measurement unit: mm

Model No.	Net Weight (Product)	Product Dimension
BCJ-K	2.6kg	243x250x78 mm





